

THE DUOMAX^M PLUS⁺

DUAL GLASS 72-CELL MODULE



72 CELL
MONOCRYSTALLINE MODULE

340-375W
POWER OUTPUT RANGE


19.1%
MAXIMUM EFFICIENCY

0~+5W
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

Comprehensive Products And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse gases Emissions Verification
 OHSAS 18001: Occupation Health and Safety Management System

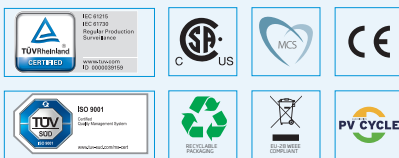

Highly reliable due to stringent quality control

- PID resistant and free of snail trails
- Increased module robustness to minimize micro-cracks
- 100% EL double inspection



Enhanced safety

- Fire class A certified by TÜV Rheinland according to fire test IEC 61730-2/MST 23
- Fire type13 (UL 1703)



Increased value


- Higher maximum system voltage reduces BOS costs
- 30 year linear warranty
- 0.5% annual degradation
- Low thermal coefficients for more energy production at higher temperatures



Certified to withstand the most challenging environmental conditions


- Module coating resistant to sand, acid, and alkali
- 2400 Pa wind load
- 5400 Pa snow load
- 35 mm hail stones at 97 km/h

Trina Solar's DUOMAX M PLUS Linear Performance Warranty

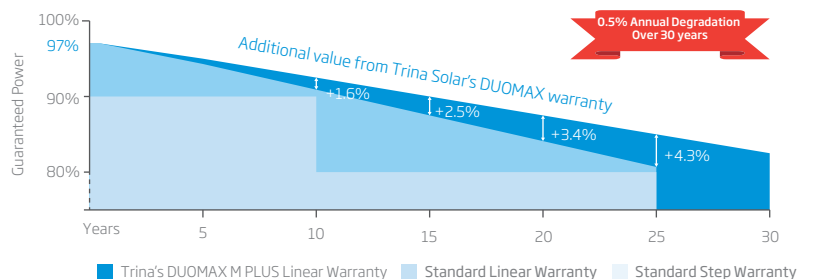


PRODUCTS	INSTALLATION METHODS	POWER RANGE
TSM-DEG14(II)	Clamp	340-375W
TSM-DEG14.40(II)	Gecko Grip	340-375W

DIMENSIONS OF PV MODULE(mm/inches)

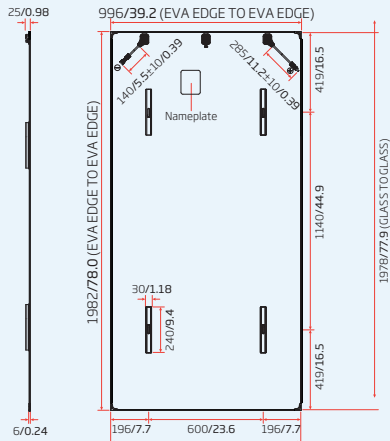


Back View (Portrait)

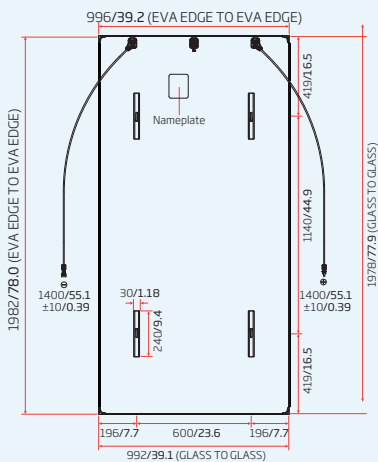


Back View (Landscape)

I-V CURVES OF PV MODULE(365W)

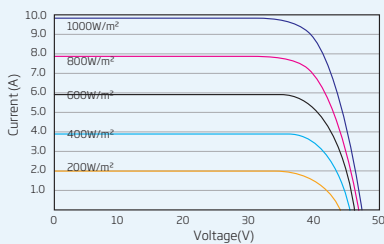

P-V CURVES OF PV MODULE(365W)

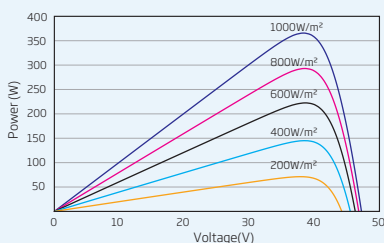

ELECTRICAL DATA (STC)

	340	345	350	355	360	365	370	375
Peak Power Watts- P_{MAX} (Wp)*	340	345	350	355	360	365	370	375
Power Output Tolerance- P_{MAX} (W)	0 ~ +5							
Maximum Power Voltage- V_{MPP} (V)	38.1	38.4	38.8	39.1	39.2	39.5	39.7	40
Maximum Power Current- I_{MPP} (A)	8.93	8.99	9.03	9.08	9.18	9.25	9.32	9.39
Open Circuit Voltage- V_{OC} (V)	46.3	46.4	46.6	46.7	46.9	47.1	47.3	47.5
Short Circuit Current- I_{SC} (A)	9.41	9.44	9.48	9.52	9.57	9.61	9.66	9.71
Module Efficiency η_m (%)	17.3	17.6	17.8	18.1	18.3	18.6	18.9	19.1

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

	253	257	261	264	268	272	276	279
Maximum Power- P_{MAX} (Wp)	253	257	261	264	268	272	276	279
Maximum Power Voltage- V_{MPP} (V)	35.3	35.6	36.0	36.3	36.4	36.6	36.8	37.1
Maximum Power Current- I_{MPP} (A)	7.18	7.22	7.26	7.30	7.38	7.43	7.49	7.54
Open Circuit Voltage- V_{OC} (V)	43.0	43.1	43.3	43.4	43.6	43.8	44.0	44.1
Short Circuit Current- I_{SC} (A)	7.60	7.62	7.65	7.69	7.73	7.76	7.80	7.84

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline 156.75 × 156.75 mm (6 inches)
Cell Orientation	72 cells (6 × 12)
Module Dimensions	1978 × 992 × 25 mm (77.9 × 39.1 × 0.98 inches)
	1982 × 996 × 6 mm with edge banding (78.0 × 39.2 × 0.98 inches)
	1984 × 998 × 7.6 mm with corner protector (78.1 × 39.3 × 0.98 inches) (Std)*
Weight	28.0 kg (61.7 lb)
Front Glass	2.5 mm (0.10 inches), High Transmission, AR Coated Heat Strengthened Glass
EVA	White
Back Glass	2.5 mm (0.10 inches), Heat Strengthened Glass
Frame	Frameless
J-Box	IP 67 or IP 68 rated
Cables	Photovoltaic Technology Cable 4.0 mm ² (0.006 inches ²)
	Portrait: 140/285 mm (5.5/11.2 inches) Landscape: 1400/1400 mm (55.1/55.1 inches)
Connector	UTX/MC4-EVO2
Fire Type	Type 13

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	44°C (±2°C)
Temperature Coefficient of P_{MAX}	- 0.39%/°C
Temperature Coefficient of V_{OC}	- 0.29%/°C
Temperature Coefficient of I_{SC}	0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1000V DC (UL)
Max Series Fuse Rating	15A(Power ≤365W) 20A(Power ≥370W)

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

WARRANTY

- 10 year Product Workmanship Warranty
- 30 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

- Modules per box: 33 pieces
- Modules per 40' container: 726 pieces

MORE OPTIONS

- More Options
- Compact AR Coating
- POE (Polyolefin Elastomer) Adhesive

*Not applicable to slide-in racking solution

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2017 Trina Solar Limited. All rights reserved. Specifications included in this datasheet are subject to change without notice.

Version number: TSM_EN_2017_C

www.trinasolar.com